

Passive Crossover **GZUX 165.2SQ**




Main Features

- High-grade SQ 2-way passive crossover
- 12 dB/oct crossover slope
- Variable tweeter cut-off frequency
- 3-step adjustable tweeter level
- Gold plated terminals
- GZ-design housing

Art.nr 81523020

Dimensions

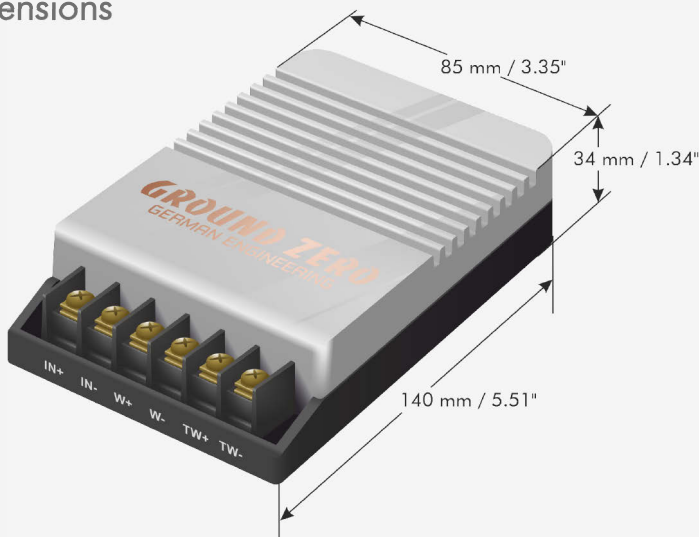

Specifications

Crossover type	2-way passive crossover
Frequency response	5 Hz – 50 kHz
Tweeter level control	3 steps (+2/0/-2 dB)
High pass frequency (high position)	5500 Hz (12 dB/oct.)
High pass frequency (low position)	4800 Hz (12 dB/oct.)
Low pass frequency	4800 Hz (12 dB/oct.)
Speaker terminal	Gold plated screw connection
Max. power handling	230 Watts max.
Cont. power handling	140 Watts RMS

Wiring

