

LIVE



Driven by passion.

T1025 TI

High resolution tweeter


- 25 mm Titanium tweeter
- Impedance 4 Ω , Neo magnet
- Double push pull high efficiency magnet (N38H neodymium)
- Ferrofluid for high power handling




TECHNICAL SPECIFICATIONS

Component	Tweeter	
Max power	100 W	
Nominal power	20 W	
Impedance	4 Ω	
Freq. Response	3 kHz - 25 KHz	
Sensitivity (2,83V/1m)	95.1 dB	
Magnet	Neodymium	
Magnet size $\varnothing \times h$	25 x 3 mm	0.965 "x 0.118 "
Total driver displacement	-	-
Weight of one component	0.07 kg	0.15 lb
Voice coil $\varnothing$	24 mm	0.961"
Voice coil height	2.0 mm	0.079"
Cone	Titanium	

Unit : mm

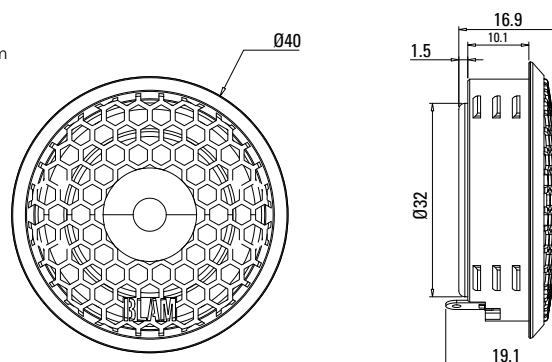

FREQUENCY RESPONSE / IMPEDANCE

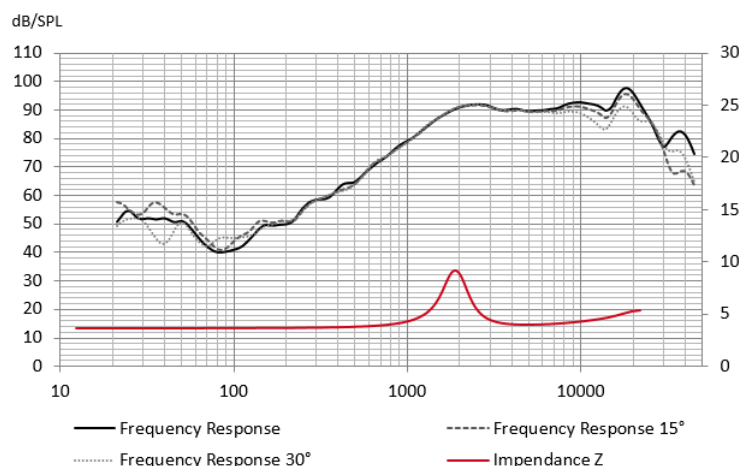

THIELE-SMALL PARAMETERS

effective $\varnothing$ (d)	-
Sd	-
Xmax	-
Re	3.6 Ω
Fs	1900 Hz
Le	-
Le	-
Vas	-
Mms	-
Cms	-
BL	-
Qts	-
Qes	-
Qms	-
Sensitivity (dB/W/m)	91.6 dB

contact@blam-audio.fr
www.facebook.com/blamaudio

www.blam-audio.com